


**Product Description:**

**ROCK-TRED's Flake Blends**, also known as color chips, flake or fleck are composed of water-based resin materials, organic minerals, additives and various pigments. This unique product is integrally pigmented, brilliantly colored, random in shape, sized within a standardized range and custom blended with infinite options to achieve optimal appearance and texture qualities with a resin-based flooring or wall-coating system.

**Physical Testing Information:**

|                                                   |                                        |
|---------------------------------------------------|----------------------------------------|
| Color: Spectrophotometer ASTM E1866               | $\Delta E \leq 1$ Pass                 |
| Dry Film Thickness: Micrometer ASTM D1005         | Mils Dry: 4-5 mils                     |
| Shape: Visual Evaluation                          | Random Flakes: Pass                    |
| Odor: Olfactory Evaluation ASTM D1296             | Odorless: Pass                         |
| Surface Texture: Visual Evaluation                | Smooth: Pass                           |
| Metamerism: Visual Evaluation ASTM D4086          | Non-Metallic: Pass                     |
| Sheen: 60° Gloss Meter ASTM D523                  | <15 ur: Pass                           |
| Dry Film Flexibility: Mandrel Bend Test ASTM F137 | Interior Angle $\leq 110^\circ$ : Pass |
| Hiding Power: Visual Evaluation ASTM D6762        | Opacity: Pass                          |

**Size Distribution: Normal Sieve Analysis (100g/90sec)**

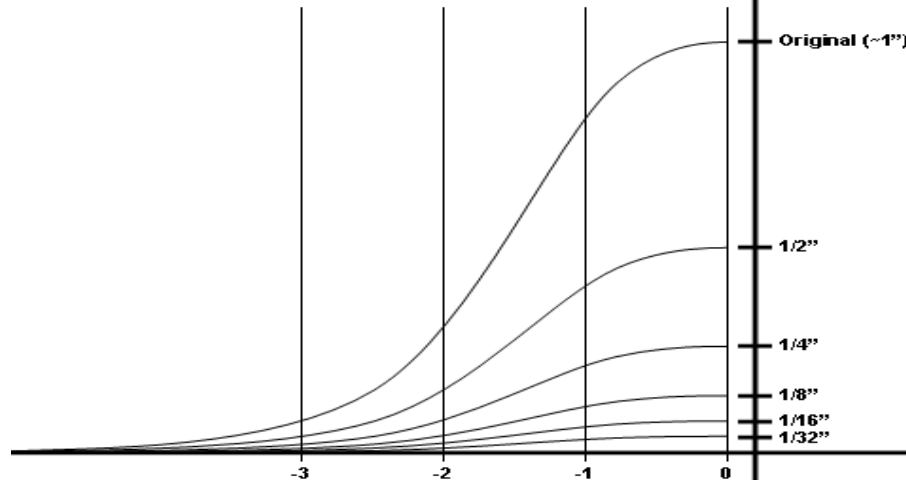

Please review ROCK-TRED's Product Data Sheet and SDS for further information on this product.