

DESCRIPTION:

The GRANITE-ROCK Flooring System is a multi-colored, decorative aggregate reinforced, 100% solids epoxy flooring system that can be installed in standard layered applications ranging from 1/16" – 3/16" thickness. The finished flooring system is very durable, impact resistant, uniformly textured and able to withstand heavy traffic and industrial use.

RECOMMENDED USES:


The GRANITE-ROCK Flooring System is specified for use as a decorative high performance flooring system in areas that are subjected to medium to heavy rolling traffic, wet areas that require uniform anti-slip texture, food processing and industrial / manufacturing areas requiring good compressive strength and impact resistance as well as excellent cleanability.

SYSTEM FEATURES:

- 100% solids and VOC Compliant throughout North America
- Range of Texture Options – from light aggregate finishes to extremely aggressive finishes
- Meets USDA / FDA guidelines for installation in inspected facilities
- Good Chemical Resistance
- Good Abrasion Resistance
- Very Good Impact Resistance
- Excellent Inter-coat Cohesion
- 12 Standard Color Blends and infinite Custom Blends
- Easy to Clean and Maintain
- Gloss Finish is Standard
- Easy Mixing Ratios and Application Steps
- GRANITE-ROCK Aggregate carries a 10-year color fast "no fade" warrantee

BASIC SYSTEM INSTALLATION STEPS:

1. Prepare substrate according to ROCK-TRED's Surface Preparation Guide. A minimum surface profile of CSP-2 is recommended.
2. Perform any necessary substrate patching using approved ROCK-TRED materials.
3. Apply appropriate clear or solid color primer for job site conditions and for desired system thickness. If performing a single broadcast to rejection a separate, solid color primer is required.
4. After primer is sufficiently cured, apply broadcast "seed" coat using clear CHEM-ROCK LV-UV, LV, MV, LT-45, ECO-POXI or CHEM-THANE P-50, 80 or 100 at approximately 125-150 square feet per gallon. Immediately broadcast GRANITE-ROCK aggregate to rejection. Approximate coverage for aggregate media will be ½ pound per square foot per full broadcast layer.
5. After seed coat is sufficiently cured sweep excess aggregate off using a clean bristle broom and discard aggregate.
6. If the System is a single broadcast, apply clear locking finish coat using CHEM-ROCK LV-UV, LV, MV or CHEM-THANE P50 or 100 at approximately 80 square feet per gallon. Two topcoats may be required for a uniformly smooth finish.

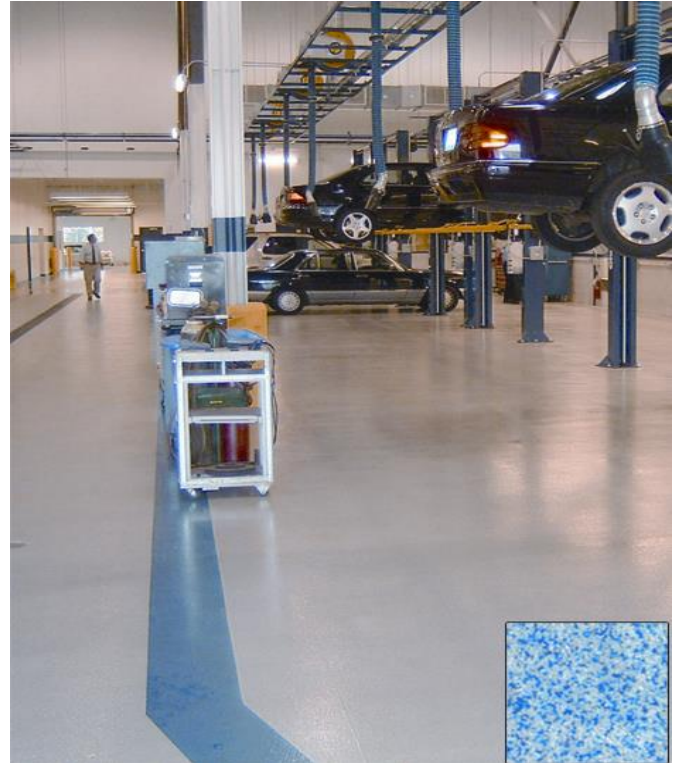

If performing multiple broadcasts to rejection, broadcasting into the primer is acceptable and using a ½ load of colorant is recommended. Recommended ROCK-TRED primers for this system include POXI-ROCK Primer and CHEM-ROCK Primer. Install at manufacturer's recommended coverage rates.

GRANITE-ROCK SYSTEM DATA SHEET

- If the System is to receive multiple broadcasts, skip Step 6 and apply a subsequent broadcast coat using CHEM-ROCK LV-UV, LV, MV, ECO-POXI or CHEM-THANE P50 or 100 at approximately 80 square feet per gallon. Immediately broadcast GRANITE-ROCK aggregate to rejection. Approximate coverage for aggregate media will be ½ pound per square foot per full broadcast layer.
 - If desired, repeat Steps 5 and 7 to increase system thickness by 1/16" per each additional full broadcast.
 - After final broadcast is swept, apply clear locking finish coat using CHEM-ROCK LV-UV, LV, MV or CHEM-THANE P50 or 100 at approximately 80 square feet per gallon. Two topcoats may be required for a uniformly smooth finish.
- If need is indicated through proper ASTM testing, or as a precaution, ICP's Arizona Polymer Flooring's VaporSolve System can be applied directly to the concrete prior to the primer coat to mitigate moisture vapor transmission.
 - DO NOT thin the polymer products unless directed on the Tech Data Sheets or Labels.
 - DO NOT apply when humidity exceeds 70% indoors.
 - DO NOT allow material to puddle during application.
 - Allow each coat to dry tack-free or clear before recoating.
 - Apply each coat within 24 hours of previous coat.
 - Mix full kits of resin/hardener only. Kit components are pre-measured for optimal performance. Catalyzation errors due to improper mixing in the field voids product warranty.

SURFACE PREPARATION:

The substrate must be clean, dry and sound. New concrete should be cured for at least 28 days @ 70°F and have an effective moisture vapor barrier in place. If the concrete is too new, and/or when moisture testing per ASTM F2170 shows results over 80% RH, the substrate should be treated with ICP's Arizona Polymer Flooring System's Vapor Solve System per specifications. Remove dust, laitance, grease, curing compounds, waxes, foreign particles, disintegrated or soft base materials and any previously applied potentially incompatible coatings. Create a surface profile on the substrate by either steel shot blasting or diamond grinding to a minimum CSP-2 profile. For additional floor preparation information refer to ROCK-TRED'S Surface Preparation Guide.

Review ROCK-TRED'S Safety Data Sheets (SDS), labels and individual technical data sheets for the component products prior to mixing and applying.

ADDITIONAL REFERENCE MATERIAL:

GRANITE-ROCK Flooring System AIA Specification
Component Tech Data Sheets
Component Material Safety Data Sheets
ROCK-TRED's Surface Preparation Guide
ROCK-TRED's Floor Maintenance Instructions

MAINTENANCE: For optimal floor appearance and performance following installation, refer to ROCK-TRED's Floor Maintenance Instructions.

CUSTOMER NOTE: For information on application situations not covered above, contact your local ROCK-TRED representative or the corporate office at 888-ROCK-TRED.

SYSTEM COMPONENT PRODUCTS:

- Primers: CHEM-ROCK PRIMER or POXI-ROCK PRIMER
- Intermediate broadcast coats: ECO-POXI, CHEM-ROCK LV, MV, LT-45, LV-UV or CHEM-THANE P50 or P100.
- Locking top/finish coats: CHEM-ROCK LV, MV, LT-45, LV-UV or CHEM-THANE P50 or P100.
- GRANITE-ROCK Aggregate
- ROCK-TRED colorant.

OPTIONAL SYSTEM COMPONENT PRODUCTS:

- Apply additional finish coat from the CHEM-THANE Series for added abrasion resistance, or if a lower sheen finish is desired.
- Pre-patching to non-moving joints, cracks, spalls or eroded areas of concrete can be completed using ROCK-TRED's Poxi-Rock Flooring Mortar, Crack N Patch Kits or RQP rapid set patching compound.
- If the concrete substrate is less than 5 years old, or there is evidence of minor movement along the control joints, control joints through the GRANITE-ROCK Flooring System should be installed. After cutting, the joints can be filled with ROCK-TRED's ELASTI-POXI JOINT FILL for color matched and permanently flexible sealed joints.

FOR BEST RESULTS:

- Recommended for Interior Use Only UNLESS Chem-Thane P50/P100 are used for broadcast and topcoats.

WARRANTY STATEMENT:

Information about ROCK-TRED products is given to the best of our knowledge, based on tests and experience. Such information supplied about our products is not a representation or a warranty. It is supplied on the condition that you will make your own tests to determine the suitability of the product for your particular purpose. As products are often applied or used under conditions beyond our control, ROCK-TRED cannot guarantee anything but the quality of its products. ROCK-TRED warrants that its products meet the specifications set forth by ROCK-TRED, but we reserve the right to change any given specification without prior notice. ROCK-TRED DISCLAIMS ALL WARRANTIES RELATING TO THE PRODUCTS AND THEIR APPLICATION, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Receipt of ROCK-TRED products constitutes acceptance of the terms of this limited warranty and the terms and the conditions set out in our invoice, contrary provisions of buyer's purchase documents notwithstanding. Upon receipt of merchandise, purchaser has 30 days to notify ROCK-TRED in writing that materials are defective. In the event ROCK-TRED finds that the product delivered is off specification, ROCK-TRED will, at its sole discretion, either replace the product or refund the purchase price thereof, and ROCK-TRED's choice of one of these remedies is the buyer's sole remedy. In no event shall the liability of ROCK-TRED exceed the purchase price of shipped merchandise. Claims must be in writing. Claims after 30 days are void. ROCK-TRED will under no circumstances be liable for special, incidental or consequential damages. This warranty supercedes all other guaranties, whether oral or written, and whether expressed, implied or statutory. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sale of our products. Certain products may contain chemicals which may cause serious physical injury. Before using, please read the Material Safety Data Sheet and follow all precautions to prevent bodily harm.